APPENDIX A

OMB Approval Number: 2050-0095 Approved for Use Through: 1/92

PA Scoresheets

Old HRS SGW = 53.69 SSW = 8.86 SAIR = 0.00 SSOIL = N/A STOTAL = 31.45V

CERCLIS ID No.:

Street Address: River Avenue + E. State St Street Address: 26 Federal

City/State/Zip: <u>Camden</u>, N, J.

Investigator: Gina Ferreira

Agency/Organization: U, S, E, A

INSTRUCTIONS FOR SCORESHEETS

Introduction

This scoresheets package functions as a self-contained workbook providing all of the basic tools to apply collected data and calculate a PA score. Note that a computerized scoring tool, "PA-Score," is also available from EPA (Office of Solid Waste and Emergency Response, Directive 9345.1-11). The scoresheets provide space to:

- Record information collected during the PA
- Indicate references to support information
- Select and assign values ("scores") for factors
- Calculate pathway scores
- Calculate the site score

Do not enter values or scores in shaded areas of the scoresheets. You are encouraged to write notes on the scoresheets and especially on the Criteria Lists. On scoresheets with a reference column, indicate a number corresponding to attached sources of information or pages containing rationale for hypotheses; attach to the scoresheets a numbered list of these references. Evaluate all four pathways. Complete all Criteria Lists, scoresheets, and tables. Show calculations, as appropriate. If scoresheets are photocopy reproduced, copy and submit the numbered pages (right-side pages) only.

GENERAL INFORMATION

Site Description and Operational History: Briefly describe the site and its operating history. Provide the site name, owner/operator, type of facility and operations, size of property, active or inactive status, and years of waste generation. Summarize waste treatment, storage, or disposal activities that have or may have occurred at the site; note also if these activities are documented or alleged. Identify probable source types and prior spills. Summarize highlights of previous investigations.

Probable Substances of Concern: List hazardous substances that have or may have been stored, handled, or disposed at the site, based on your knowledge of site operations. Identify the sources to which the substances may be related. Summarize any existing analytical data concerning hazardous substances detected onsite, in releases from the site, or at targets.

GENERAL INFORMATION

Si -

Advanced Chemical Technology (ACT) is located on the eastern corner of East State Street and River Road in Camden N.J. Site was previously owned by RCA from 1942 to 1970. Camden Prop. leased the site to ACT in Feb 1974. ACT manufactured plastic industrial containers. On Tan. 12, 1984, ACT sold all equipment and assests to Russell-Stanley East, Inc. who continued the same operation at the site.

The immediate area is industrialized and the general area is urbanized. Approximately one million people reside within the miles of the site. Harrison Avenue Landfill. Is located v. 1750 feet northwest of the site. bordering the belayare and Cooper Rivers. Oil stains on soil outside the building were observed on numerous Occasions. Soil sampling and groundwater monitoring twere performed in 1984.

Probable Substances of Concern:

(Previous investigations, analytical data)

Soil Samples From areas outside the building


Showed excess levels of petroleum hydrocarbons, metals, and base neutral extractables. Samples from 1984.

1989 samples revealed petroleum and metal
contaminants indicating more extensive
soil contamination than previously
assumed.

Groundwater samples from monitoring wells
in 1988 indicated elevated levels of petroleum hydrocarbons, chromium, cadmium,
Further sampling was requested at this time.

GENERAL INFORMATION (continued)

Site Sketch: Prepare a sketch of the site (freehand is acceptable). Indicate all pertinent features of the site and nearby environs, including: waste sources, buildings, residences, access roads, parking areas, drainage patterns, water bodies, vegetation, wells, sensitive environments, etc.

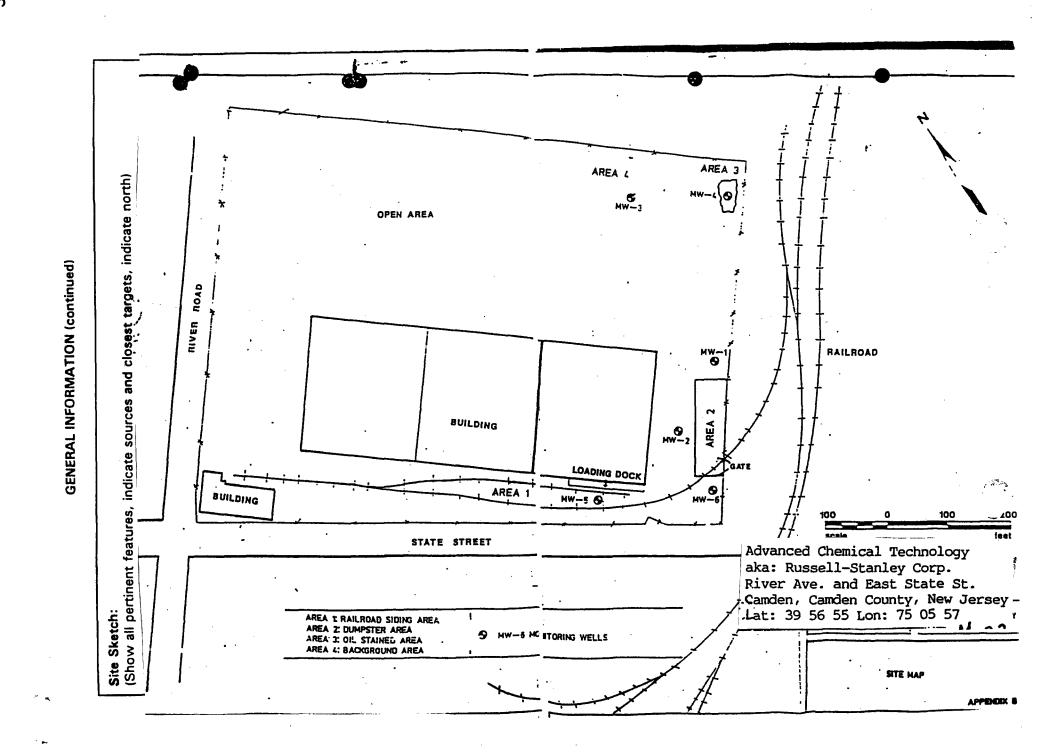

SOURCE EVALUATION

- Number and name each source (e.g., 1. East Drum Storage Area, 2. Sludge Lagoon, 3. Battery Pile).
- Identify source type according to the list below.
- Describe the physical character of each source (e.g., dimensions, contents, waste types, containment, operating history).
- Show waste quantity (WQ) calculations for each source for appropriate tiers. Refer to instructions opposite
 page 5 and PA Tables 1a and 1b. Identify waste quantity tier and waste characteristics (WC) factor category
 score (for a site with a single source, according to PA Table 1a). Determine WC from PA Table 1b for the sum
 of source WQs for a multiple-source site.
- Attach additional sheets if necessary.
- Determine the site WC factor category score and record at the bottom of the page.

Source Type Descriptions

Landfill: an engineered (by excavation or construction) or natural hole in the ground into which wastes have been disposed by backfilling, or by contemporaneous soil deposition with waste disposal, covering wastes from view.

<u>Surface Impoundment</u>: a topographic depression, excavation, or diked area, primarily formed from earthen materials (lined or unlined) and designed to hold accumulated liquid wastes, wastes containing free liquids, or sludges that were not backfilled or otherwise covered during periods of deposition; depression may be dry if deposited liquid has evaporated, volatilized or leached, or wet with exposed liquid; structures that may be more specifically described as lagoon pond, aeration pit, settling pond, tailings pond, sludge pit, etc.; also a surface impoundment that has been covered with soil after the final deposition of waste materials (i.e., buried or backfilled).

<u>Drums</u>: portable containers designed to hold a standard 55-gallon volume of wastes.

<u>Tanks and Non-Drum Containers</u>: any stationary device, designed to contain accumulated wastes, constructed primarily of fabricated materials (such as wood, concrete, steel, or plastic) that provide structural support; any portable or mobile device in which waste is stored or otherwise handled.

<u>Contaminated Soil</u>: soil onto which available evidence indicates that a hazardous substance was spilled, spread, disposed, or deposited.

<u>Pile</u>: any non-containerized accumulation above the ground surface of solid, non-flowing wastes; includes open dumps. Some types of piles are: <u>Chemical Waste Pile</u> -- consists primarily of discarded chemical products, by-products, radioactive wastes, or used or unused feedstocks; <u>Scrap Metal or Junk Pile</u> -- consists primarily of scrap metal or discarded durable goods such as appliances, automobiles, auto parts, or batteries, composed of materials suspected to contain or have contained a hazardous substance; <u>Tailings Pile</u> -- consists primarily of any combination of overburden from a mining operation and tailings from a mineral mining, beneficiation, or processing operation; <u>Trash Pile</u> -- consists primarily of paper, garbage, or discarded non-durable goods which are suspected to contain or have contained a hazardous substance.

<u>Land Treatment</u>: landfarming or other land treatment method of waste management in which liquid wastes or sludges are spread over land and tilled, or liquids are injected at shallow depths into soils.

Other: a source that does not fit any of the descriptions above; examples include contaminated building, ground water plume with no identifiable source, storm drain, dry well, and injection well.

SOURCE EVALUATION

Source | Squrce Name: Abow ground tanks | Source Waste Quantity (WQ) Calculations: 3 x 2.75 gallons = 825 gallons |

Source Description: 3 x 2.75 gallons = 825 gallons |

Source Description: 3 x 2.75 gallons = 825 gallons |

Source Waste Quantity (WQ) Calculations: 3 x 2.75 gallons = 825 gallons |

Source Waste Quantity (WQ) Calculations: 3 x 2.75 gallons = 825 gallons |

Source Waste Quantity (WQ) Calculations: 3 x 2.75 gallons = 825 gallons |

Source Waste Quantity (WQ) Calculations: 3 x 2.75 gallons = 825 gallons |

Source Waste Quantity (WQ) Calculations: 3 x 2.75 gallons = 825 gallons |

Source Waste Quantity (WQ) Calculations: 3 x 2.75 gallons = 825 gallons |

Source Waste Quantity (WQ) Calculations: 3 x 2.75 gallons = 825 gallons |

Source Waste Quantity (WQ) Calculations: 3 x 2.75 gallons = 825 gallons |

Source Waste Quantity (WQ) Calculations: 3 x 2.75 gallons = 825 gallons |

Source Waste Quantity (WQ) Calculations: 3 x 2.75 gallons = 825 gallons |

Source Waste Quantity (WQ) Calculations: 3 x 2.75 gallons = 825 gallons |

Source Waste Quantity (WQ) Calculations: 3 x 2.75 gallons = 825 gallons |

Source Waste Quantity (WQ) Calculations: 3 x 2.75 gallons |

Source Waste Quantity (WQ) Calculations: 3 x 2.75 gallons |

Source Waste Quantity (WQ) Calculations: 3 x 2.75 gallons |

Source Waste Quantity (WQ) Calculations: 3 x 2.75 gallons |

Source Waste Quantity (WQ) Calculations: 3 x 2.75 gallons |

Source Waste Quantity (WQ) Calculations: 3 x 2.75 gallons |

Source Waste Quantity (WQ) Calculations: 3 x 2.75 gallons |

Source Waste Quantity (WQ) Calculations: 3 x 2.75 gallons |

Source Waste Quantity (WQ) Calculations: 3 x 2.75 gallons |

Source Waste Quantity (WQ) Calculations |

Source Waste Quantity (WQ) C

Source 2 Source Name:
No.: 2 Drums

Source Description: 3759 gallon drums

Of waste 071

Source Waste Quantity (WQ) Calculations:

(WS) 37×50 gal = 18500 gal 1850 gal = 18500 lbs = 3.7(Val) 37 = 3.7

Source 3 Source Name: Contaminated Soil Source Waste Quantity (WQ) Calculations:

Source Description:

382 tons removed

in 1984 More contaminated Soil

Nated Soil Source Waste Quantity (WQ) Calculations:

382 tons = 382 yd

(Vol) 382 yd

2500

0,15

1.65+3.7+0.15=5.50

Site WC:

WASTE CHARACTERISTICS (WC) SCORES

WC, based on waste quantity, may be determined by one or all of four measures called "tiers": constituent quantity, wastestream quantity, source volume, and source area. PA Table 1a (page 5) is divided into these four tiers. The amount and detail of information available determine which tier(s) to use for each source. For each source, evaluate waste quantity by as many of the tiers as you have information to support, and select the result that gives you the highest WC score. If minimal, incomplete, or no information is available regarding waste quantity, assign a WC score of 18 (minimum).

PA Table 1a has 6 columns: column 1 indicates the quantity tier; column 2 lists source types for the four tiers; columns 3, 4, and 5 provide ranges of waste amount for sites with only one source, which correspond to WC scores at the top of the columns (18, 32, or 100); column 6 provides formulas to obtain source waste quantity (WQ) values at sites with multiple sources.

To determine WC for sites with only one source:

- 1. Identify source type (see descriptions opposite page 4).
- 2. Examine all waste quantity data available.
- 3. Estimate the mass and/or dimensions of the source.
- 4. Determine which quantity tiers to use based on available source information.
- 5. Convert source measurements to appropriate units for each tier you can evaluate for the source.
- 6. Identify the range into which the total quantity falls for each tier evaluated (PA Table 1a).
- 7. Determine the highest WC score obtained for any tier (18, 32, or 100, at top of PA Table 1a columns 3, 4, and 5, respectively).
- 8. Use this WC score for all pathways.*

To determine WC for sites with multiple sources:

- 1. Identify each source type (see descriptions opposite page 4).
- 2. Examine all waste quantity data available for each source.
- Estimate the mass and/or dimensions of each source.
- 4. Determine which quartity tiers to use for each source based on the available information.
- Convert source measurements to appropriate units for each tier you can evaluate for each source.
- 6. For each source, use the formulas in column 6 of PA Table 1a to determine the WQ value for each tier that can be evaluated. The highest WQ value obtained for any tier is the WQ value for the source.
- 7. Sum the WQ values for all sources to get the site WQ total.
- 8. Use the site WQ total from step 7 to assign the WC score from PA Table 1b.
- 9. Use this WC score for all pathways.*

^{*} The WC score is considered in all four pathways. However, if a primary target is identified for the ground water, surface water, or air migration pathway, assign the determined WC or a score of 32, whichever is greater, as the WC score for that pathway.

PA TABLE 1: WASTE CHARACTERISTICS (WC) SCORES

PA Table 1a: WC Scores for Single Source Sites and Formulas for Multiple Source Sites

7		SINGLE	SOURCE SITES (assigned WC	scores)	MULTIPLE SOURCE SITES
E	SOURCE TYPE	WC = 18	WC = 32	WC = 100	Formula for Assigning Source WQ Values
CONSTITUENT	N/A	≤100 lb	> 100 to 10,000 lb	> 10,000 lb	/b + 1
Seat-wat-REEM	N/A	≤500,000 lb	>500,000 to 50 million lb	>50 million lb	1b + 5,000
	Landfill	≤6.75 million ft³ ≤250,000 yd²	>6.75 million to 675 million ft ³ >250,000 to 25 million yd ³	>675 million ft ³ >25 million yd ²	$ft^3 + 67,500$ $yd^3 + 2,500$
	Surface impoundment	≤6.750 ft³ ≤250 yd³	> 6,750 to 675,000 ft ² > 250 to 25,000 yd ³	>675,000 ft ³ >25,000 yd ³	$ft^3 + 67.5$ $yo^3 + 2.5$
v	Drums	≤1,000 drums	>1,000 to 100,000 drums	>100,000 drums	drums + 10
n 0	Tanks and non- drum containers	≤50,000 gallons	>50,000 to 5 million gallons	>5 million gallons	gallons + 500
M	Contaminated soil	≤6.75 million ft ³ ≤250.000 yd ³	>6.75 million to 675 million ft ³ >250,000 to 25 million yd ³	>675 million ft ² >25 million yd ³	ft ³ + 67,500 yd ³ + 2,500
	Pile	≤6,750 ft³ ≤250 yd³	>6,750 to 675,000 ft ³ > 250 to 25,000 yd ³	> 675,000 ft ³ > 25,000 yd ³	$ft^3 + 67.5$ $yd^3 + 2.5$
	Other	≤6,750 ft³ ≤250 yd³	>6,750 to 675,000 ft ² >250 to 25,000 yd ²	>675,000 ft ³ >25,000 yd ³	$ft^3 + 67.5$ $yo^3 + 2.5$
	Landfill	≤340,000 ft² ≤7.8 acres	>340,000 to 34 million ft ² >7.8 to 780 acres	>34 million ft ² >780 scres	ft ² + 3,400 acres + 0.078
	Surface impoundment	≤1,300 ft ² ≤0.029 acres	>1,300 to 130,000 ft ² >0.029 to 2.9 acres	>130,000 ft ² >2.9 acres	ft ² + 13 acres + 0.00029
ARE	Contaminated soil	≤3.4 million ft ² ≤78 acres	>3.4 million to 340 million ft ³ >78 to 7,800 acres	>340 million ft ² >7,800 scree	ft ² + 34,000 acres + 0.78
^	Pile*	≤1,300 ft ² ≤0.029 ecree	>1,300 to 130,000 ft ² >0.029 to 2.9 scres	>130,000 ft ² >2.9 sores	ft ² + 13 acres + 0.00029
,	Land treatment	≤27,000 ft² ≤0.62 acres	> 27,000 to 2.7 million ft ² > 0.62 to 62 agree	>2.7 million ft² >62 acres	$tt^2 + 270$ acres + 0.0062

¹ ton = 2,000 lb = 1 yd3 = 4 drums = 200 gallons


PA Table 1b: WC Scores for Multiple Source Sites

WQ Total	WC Score
>0 to 100	19
>100 to 10,000	32
>10,000	100

^{*} Use area of land surface under pile, not surface area of pile.

GROUND WATER PATHWAY

Ground Water Use Description: Provide information on ground water use in the vicinity. Present the general stratigraphy, aquifers used, and distribution of private and municipal wells.

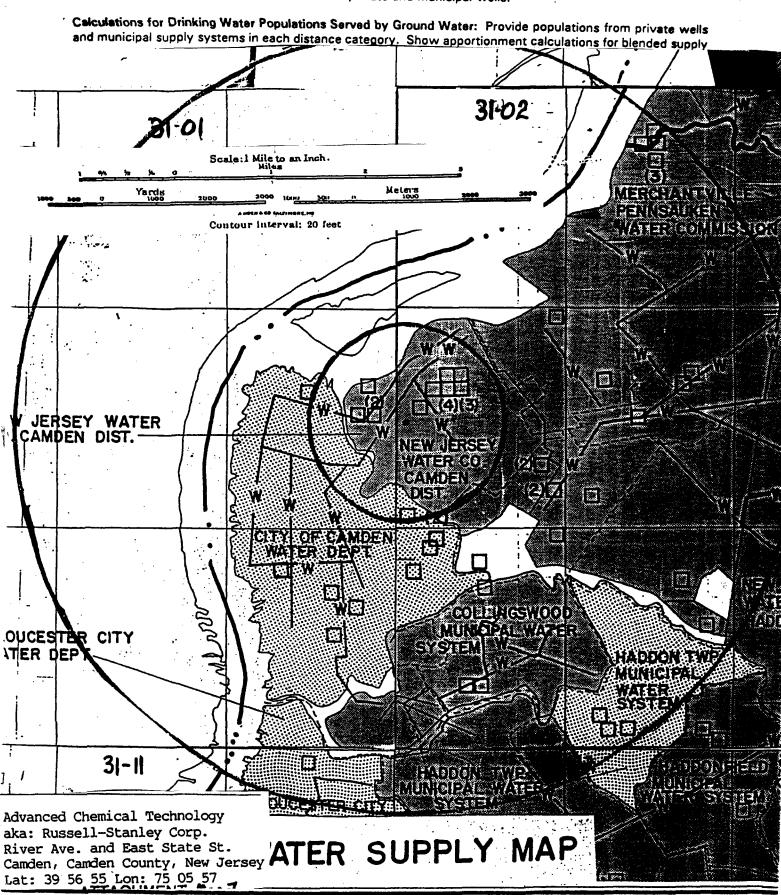

GROUND WATER PATHWAY GROUND WATER USE DESCRIPTION

Describe Ground Water Use Within 4-miles of the Site:
(Describe stratigraphy, information on aquifers, municipal and/or private wells)

Advanced Chemical Technology (Jes within a major physiographic division of the Atlantic Coastal plain. The site overlies the Potomac-Ravitan-Plain. The site overlies the Potomac-Ravitan-Wagothy aguster system. The system consists of aquifer anits composed of sand to gravel of aquifer anits composed of sand to gravel. Three major agusters have been identified (lower, middle tupper) units. Groundwater is reached at depths ranging from 2.3 to 7.9 feet below grade at the site The direction of groundwater flow is to the east within of groundwater flow is to the east within the northern portion of the site and to the southeast within the southern portion, the closest public supply well is Camden's The closest public supply well is Camden's City Well #16 (750 feet north). This well is closed and used as a monitoring well. The remaining city wells within I will are either seated, abandoned, or used for monitoring.

Calculations for Drinking Water Populations Served by Ground Water:

New Jersey Water Company — 36,500

9 wells win I mile. (171 + 399 ft.)

Merchantville - Pennsauken — 50,000

Water Commission

9 wells win 5 miles (139-360 ft deep)

9 wells win 5 miles (139-370 ft.)

Swells win 5 miles (294-370 ft.)

City of Camaln — 50,000

15 wells win 5 miles

(118-401 feet deep)

Twells within, I mile

Colosed, sealed, abandoned,

or we'd for monitoring)

GROUND WATER PATHWAY CRITERIA LIST

This "Criteria List" helps guide the process of developing hypotheses concerning the occurrence of a suspected release and the exposure of specific targets to a hazardous substance. The check-boxes record your professional judgment in evaluating these factors. Answers to all of the listed questions may not be available during the PA. Also, the list is not all-inclusive; if other criteria help shape your hypotheses, list them at the bottom of the page or attach an additional page.

The "Suspected Release" section identifies several site, source, and pathway conditions that could provide insight as to whether a release from the site is likely to have occurred. If a release is suspected, use the "Primary Targets" section to evaluate conditions that may help identify targets likely to be exposed to a hazardous substance. Record responses for the well that you feel has the highest probability of being exposed to a hazardous substance. You may use this section of the chart more than once, depending on the number of targets you feel may be considered "primary."

Check the boxes to indicate a "yes," "no," or "unknown" answer to each question. If you check the "Suspected Release" box as "yes," make sure you assign a Likelihood of Release value of 550 for the pathway.

GROUND WATER PAT	HWAY CRITERIA LIST
SUSPECTED RELEASE .	PRIMARY TARGETS
Y N U e o n k Are sources poorly contained? Is the source a type likely to contribute to ground water contamination (e.g., wet lagoon)? Is waste quantity particularly large? Is precipitation heavy?	Y N U e o n s k ls any drinking water well nearby? Has any nearby drinking water well been closed? Has any nearby drinking water user reported foul-tasting or foul-smelling water? Does any nearby well have a large drawdown
□ ★ □ Is the infiltration rate high? □ ★ □ Is the site located in an area of karst terrain? ★ □ □ Is the subsurface highly permeable or conductive? ★ □ Is drinking water drawn from a shallow aquifer? ★ □ □ Are suspected contaminants highly mobile in ground water? ■ □ □ Does analytical or circumstantial evidence suggest ground water contamination? □ ■ Other criteria?	or high production rate? Is any drinking water well located between the site and other wells that are suspected to be exposed to a hazardous substance? Does analytical or circumstantial evidence suggest contamination at a drinking water well? Does any drinking water well warrant sampling? Other criteria? PRIMARY TARGET(S) IDENTIFIED?
Suspected Release? Summarize the rationale for Suspected Release (attach an additional page if necessary): Groundwater monitoring Wells on-Site Show elevated	Summarize the rationale for Primary Targets (attach an additional page if necessary): Primary targets are not
levels of petroleum hydro- carbons. Chromium was found to exceed NUSEP Action Levels for Groundwater.	\sim

GROUND WATER PATHWAY SCORESHEET

Pathway Characteristics

Answer the questions at the top of the page. Refer to the Ground Water Pathway Criteria List (page 7) to hypothesize whether you suspect that a hazardous substance associated with the site has been released to ground water. Record depth to aquifer (in feet): the difference between the deepest occurrence of a hazardous substance and the depth of the top of the shallowest aquifer at (or as near as possible) to the site. Note whether the site is in karst terrain (characterized by abrupt ridges, sink holes, caverns, springs, disappearing streams). Record the distance (in feet) from any source to the nearest well used for drinking water.

Likelihood of Release (LR)

- 1. Suspected Release: Hypothesize based on professional judgment guided by the Ground Water Pathway Criteria List (page 7). If you suspect a release to ground water, use only Column A for this pathway and do not evaluate factor 2.
- 2. No Suspected Release: If you do not suspect a release, determine score based on depth to aquifer or whether the site is in an area of karst terrain. If you do not suspect a release to ground water, use only Column B to score this pathway.

Targets (T)

This factor category evaluates the threat to populations obtaining drinking water from ground water. To apportion populations served by blended drinking water supply systems, determine the percentage of population served by each well based on its production.

- 3. Primary Target Population: Evaluate populations served by all drinking water wells that you suspect have been exposed to a hazardous substance released from the site. Use professional judgment guided by the Ground Water Pathway Criteria List (page 7) to make this determination. In the space provided, enter the population served by any wells you suspect have been exposed to a hazardous substance from the site. If only the number of residences is known, use the average county residents per household (rounded up to the next integer) to determine population served. Multiply the population by 10 to determine the Primary Target Population score. Note that if you do not suspect a release, there can be no primary target population.
- 4. Secondary Target Population: Evaluate populations served by all drinking water wells within 4 miles that you do not suspect have been exposed to a hazardous substance. Use PA Table 2a or 2b (for wells drawing from non-karst and karst aquifers, respectfully) (page 9). If only the number of residences is known, use the average county residents per household (rounded to the nearest integer) to determine population served. Circle the assigned value for the population in each distance category and enter it in the column on the far-right side of the table. Sum the far-right column and enter the total as the Secondary Target Population factor score.
- 5. Nearest Well represents the threat posed to the drinking water well that is most likely to be exposed to a hazardous substance. If you have identified a primary target population, enter 50. Otherwise, assign the score from PA Table 2a or 2b for the closest distance category with a drinking water well population.
- 6. Wellhead Protection Area (WHPA): WHPAs are special areas designated by States for protection under Section 1428 of the Safe Drinking Water Act. Local/State and EPA Regional water officials can provide information regarding the location of WHPAs.
- 7. Resources: A score of 5 can generally be assigned as a default measure. Assign zero only if ground water within 4 miles has no resource use.

Sum the target scores in Column A (Suspected Release) or Column B (No Suspected Release).


Waste Characteristics (WC)

8. Waste Characteristics: Score is assigned from page 4. However, if you have identified any primary target for ground water, assign either the score calculated on page 4 or a score of 32, whichever is greater.

<u>Ground Water Pathway Score:</u> Multiply the scores for LR, T, and WC. Divide the product by 82,500. Round the result to the nearest integer. If the result is greater than 100, assign 100.

GROUND WATER PATHWAY SCORESHEET

	Pethway Characteristics Do you suspect a release (see Ground Water Pathway Criteria List, page 7)?	Vaa)/ No /	
	Is the site located in karst terrain?	Yes Yes		
	Depth to aquifer: Distance to the nearest drinking water well:		1900 ft	
		A		
LIKELIHO	OOD OF RELEASE	Suspected Release	No Suspected Release	References
	CTED RELEASE: If you suspect a release to ground water (see page 7), a score of 550. Use only column A for this pathway.	550		
the site	SPECTED RELEASE: If you do not suspect a release to ground water, and e is in karst terrain or the depth to aquifer is 70 feet or less, assign a score; otherwise, assign a score of 340. Use only column 8 for this pathway.		[\$69 w 340]	
	LR =	550		
TARGET	s		<u> </u>	
drinkin	RY TARGET POPULATION: Determine the number of people served by g water wells that you suspect have been exposed to a hazardous noe from the site (see Ground Water Pathway Criteria List, page 7).	0		
drinkin	DARY TARGET POPULATION: Determine the number of people served by g water wells that you do NOT suspect have been exposed to a hazardous noe from the site, and assign the total population score from PA Table 2.			
	Are any wells part of a blended system? Yes No $\sqrt{}$ If yes, attach a page to show apportionment calculations.	3444	(20,18.8.5.2.2. o Ol	
water,	ST WELL: If you have identified a primary target population for ground assign a score of 50; otherwise, assign the Nearest Well score from ble 2. If no drinking water wells exist within 4 miles, assign a score of zero.	20	(20, E or 0)	
or if yo assign	HEAD PROTECTION AREA (WHPA): If any source lies within or above a WHPA, but have identified any primary target well within a WHPA, assign a score of 20; 5 if neither condition holds but a WHPA is present within 4 miles; otherwise	0		
assign		5	15-01	
7. RESOL	JRCES	3469		
	Τ=	2101		
WASTE	CHARACTERISTICS	(100 ar 32)		
cha	you have identified any primary target for ground water, assign the waste aracteristics score calculated on page 4, or a score of 32, whichever is (EATER; do not evaluate part B of this factor.	i100.32, gr 160	(100.32, ≈ 101	
	rou have NOT identified any primary target for ground water, assign the stee characteristics score calculated on page 4.	18	(100.12 - 10	
	wc =	18		
GROUN	O WATER PATHWAY SCORE: $\frac{LR \times T \times WC}{82.500}$ $\frac{550 \times 3469 \times 18}{82.500}$	(oubject to a n	neximum of 100I	
	82500			

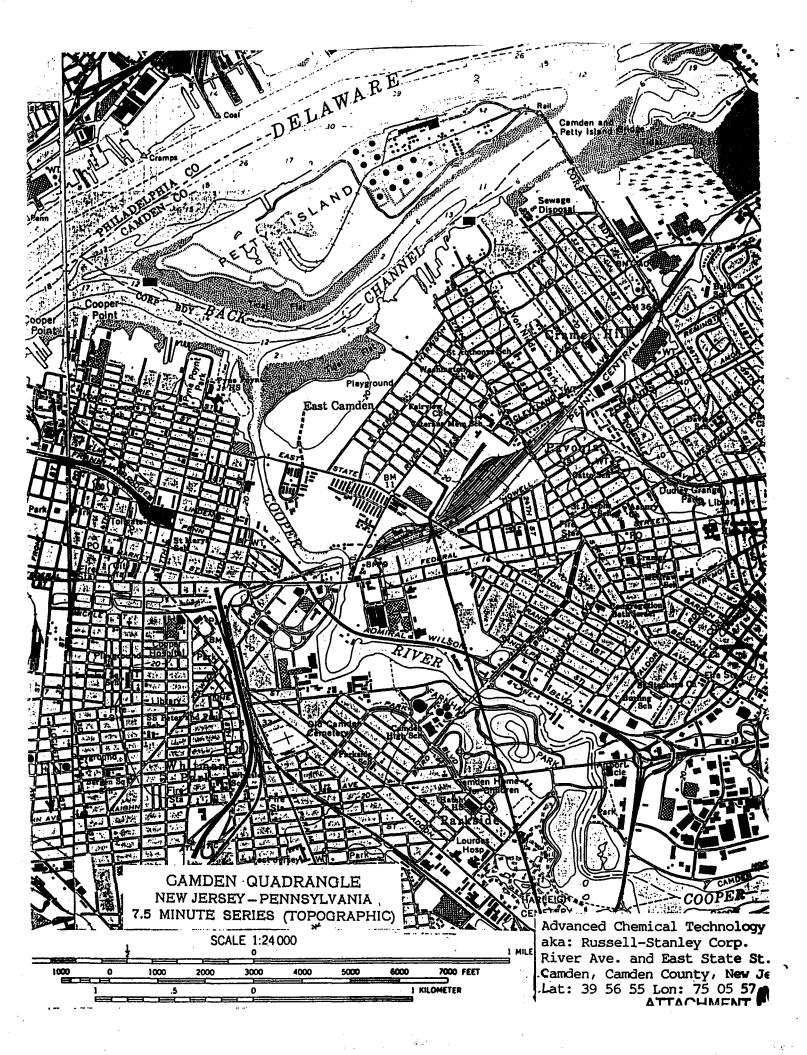

PA TABLE 2: VALUES FOR SECONDARY GROUND WATER TARGET POPULATIONS

PA Table 2a: Non-Karst Aquifers

		Nearest			Рори	lation Ser	ved by W	ells Within	n Distance	Categor	γ		
		Well	1	11	31	101	301	1,001	3,001	10,001	30,001	Greeter	
Distance		(choose	to	to	to	10	to	to	to	to	to	then	Population
from Site	Population	highest)	10	30	100	300	1,000	3,000	10,000	30,000	100,000	100,000	Value
O to % mile	7,000	20	1 ,	2	5	16	1 52	163	521	1,633	5,214	16,325	521
> % to % mile	13,000	18	1	1	3	10	32	101	323	1,012	3,233	10,121	1012
> 1/2 to 1 mile	16,500	9	1	1	2	. 5	17	52	167	522	1,668	5,224	522
> 1 to 2 miles	16,000	5	1	1	1	3	9	29	94	294	939	2,938	294
>2 to 3 miles	36,000	3	1	1	1	2	7	21	68	212	678	2,122	678
>3 to 4 miles	68,600	2	1	1	1	1	4	13	42	131	417	1,306	417
Nearest Well = Score = 3 ²										3444			

PA Table 2b: Karst Aquifers

		Nearest			Рори	lation Ser	ved by W	ells Withi	n Distance	Categor	γ		
		Well	1	11	31	101	301	1,001	3,001	10,001	30,001	Greater	
Distance		luse 20	to	to	to	to	to	to	to	to	to	then	Population
from Site	Population	for karst)	10	30	100	300	1,000	3,000	10,000	30,000	100,000	100,000	Value
O to ¼ mile		20	1	2	5	16	52	163	521	1,633	5,214	16,325	
>% to % mile		20	1	1	3	10	32	101	323	1,012	3,233	10,121	
> 1/2 to 1 mile		20	1	1	3	8	26	82	261	816	2,607	8,162	
>1 to 2 miles		20	1	1	3	8	26	82	261	816	2,607	8,162	
>2 to 3 miles		20	1	1	3	8	26	82	261	816	2,607	8,162	
>3 to 4 miles	·	20	1	1	3	8	26	82	261	816	2,607	8,162	
Nearest Well = Score =													

SURFACE WATER PATHWAY

Migration Route Sketch: Sketch the surface water migration pathway (freehand is acceptable) illustrating the drainage route and identifying water bodies, probable point of entry, flows, and targets.

SURFACE WATER PATHWAY MIGRATION ROUTE SKETCH

Suface Water Migration Route Sketch: (include runoff route, probable point of entry, 15-mile target distance limit, intakes, fisheries,



SURFACE WATER PATHWAY CRITERIA LIST

This "Criteria List" helps guide the process of developing hypotheses concerning the occurrence of a suspected release and the exposure of specific targets to a hazardous substance. The check-boxes record your professional judgment in evaluating these factors. Answers to all of the listed questions may not be available during the PA. Also, the list is not all-inclusive; if other criteria help shape your hypotheses, list them at the bottom of the page or attach an additional page.

The "Suspected Release" section identifies several site, source, and pathway conditions that could provide insight as to whether a release from the site is likely to have occurred. If a release is suspected, use the "Primary Targets" section to guide you through evaluation of some conditions that may help identify targets likely to be exposed to a hazardous substance. Record responses for the target that you feel has the highest probability of being exposed to a hazardous substance. You may use this section of the chart more than once, depending on the number of targets you feel may be considered "primary."

Check the boxes to indicate a "yes," "no," or "unknown" answer to each question. If you check the "Suspected Release" box as "yes," make sure you assign a Likelihood of Release value of 550 for the pathway.

If the distance to surface water is greater than 2 miles, do not evaluate the surface water migration pathway. Document the source of information in the text boxes below the surface water criteria list.

SURFACE WATER PAT	THWAY CRITERIA LIST
SUSPECTED RELEASE	PRIMARY TARGETS
Y N U e o n s k □ □ Is surface water nearby?	Y N U e o n s k ⊠ □ Is any target nearby? If yes:
☐ Is waste quantity particularly large?	
	☐ Drinking water intake ☐ Fishery ☐ Sensitive environment
☐ ☒ ☐ Is rainfall heavy?	☐ ☐ Has any intake, fishery, or recreational area
☐ X ☐ Is the infiltration rate low?	been closed?
Are sources poorly contained or prone to runoff or flooding?	suggest surface water contamination at or downstream of a target?
☐ ☐ Is a runoff route well defined (e.g., ditch or channel leading to surface water)?	Does any target warrant sampling? If yes:
☐ ☐ Is vegetation stressed along the probable run- off route?	☐ Drinking water intake ☐ Fishery ☐ Sensitive environment
☐ ☐ ★ Are sediments or water unnaturally discolored?	Other criteria?
☐	PRIMARY INTAKE(S) IDENTIFIED?
☐ X ☐ Has deposition of waste into surface water been observed?	PRIMARY FISHERY(IES) IDENTIFIED?
ls ground water discharge to surface water likely?	☐ ▼ PRIMARY SENSITIVE ENVIRONMENT(S) IDENTIFIED?
☐ ♥ ☐ Does analytical or circumstantial evidence suggest surface water contamination?	
□ X Other criteria?	
SUSPECTED RELEASE?	
Rivers.	Cooper River 15 used for recreational purposes There is information concerning secondary sensitive environments. There are no surface water intakes along
A	Secondary sensitive environment exists because the Delaware River is and federally endangered shortnose sturgeon.

SURFACE WATER PATHWAY LIKELIHOOD OF RELEASE AND DRINKING WATER THREAT SCORESHEET

Pathway Characteristics

The surface water pathway includes three threats: Drinking Water Threat, Human Food Chain Threat, and Environmental Threat. Answer the questions at the top of the page. Refer to the Surface Water Pathway Criteria List (page 11) to hypothesize whether you suspect that a hazardous substance associated with the site has been released to surface water. Record the distance to surface water (the shortest overland drainage distance from a source to a surface water body). Record the flood frequency at the site (e.g., 100-yr, 200-yr). If the site is located in more than one floodplain, use the most frequent flooding event. Identify surface water use(s) along the surface water migration path and their distance(s) from the site.

Likelihood of Release (LR)

- 1. Suspected Release: Hypothesize based on professional judgment guided by the Surface Water Pathway Criteria List (page 11). If you suspect a release to surface water, use only Column A for this pathway and do not evaluate factor 2.
- 2. No Suspected Release: If you do not suspect a release, determine score based on the shortest overland drainage distance from a source to a surface water body. If distance to surface water is 2,500 feet or less, assign a score of 500. If distance to surface water is greater than 2,500 feet, determine score based on flood frequency. If you do not suspect a release to surface water, use only Column B to score this pathway.

Drinking Water Threat Targets (T)

- 3. List all drinking water intakes on downstream surface water bodies along the surface water migration path. Record the intake name, the type of water body on which the intake is located, the flow of the water body, and the number of people served by the intake (apportion the population if part of a blended system).
- 4. Primary Target Population: Evaluate populations served by all drinking water intakes that you suspect have been exposed to a hazardous substance released from the site. Use professional judgment guided by the Surface Water Pathway Criteria List (page 11) to make this determination. In the space provided, enter the population served by all intakes you suspect have been exposed to a hazardous substance from the site. If only the number of residences is known, use the average county residents per household (rounded up to the next integer) to determine population served. Multiply by 10 to determine the Primary Target Population score. Remember, if you do not suspect a release, there can be no primary target population.
- 5. Secondary Target Population: Evaluate populations served by all drinking water intakes within the target distance limit that you do not suspect have been exposed to a hazardous substance. Use PA Table 3 (page 13) and enter the population served by intakes for each flow category. If only the number of residences is known, use the average county residents per household (rounded to the nearest integer) to determine population served. Circle the assigned value for the population in each flow category and enter it in the column on the far-right side of the table. Sum the far-right column and enter the total as the Secondary Target Population factor score.

Gauging station data for many surface water bodies are available from USGS or other sources. In the absence of gauging station data, estimate flow using the list of surface water body types and associated flow categories in PA Table 4 (page 13). The flow for lakes is determined by the sum of flows of streams entering or leaving the lake. Note that the flow category "mixing zone of quiet flowing rivers" is limited to 3 miles from the probable point of entry.

- 6. Nearest Intake represents the threat posed to the drinking water intake that is most likely to be exposed to a hazardous substance. If you have identified a primary target population, enter 50. Otherwise, assign the score from PA Table 3 (page 13) for the lowest-flowing water body on which there is an intake.
- 7. Resources: A score of 5 can generally be assigned as a default measure. Assign zero only if surface water within the target distance limit has no resource use.

Sum the target scores in Column A (Suspected Release) or Column B (No Suspected Release).

SURFACE WATER PATHWAY LIKELIHOOD OF RELEASE AND DRINKING WATER THREAT SCORESHEET

Pathway Characteristics

		Do you suspect a release (see Surface Water P Distance to surface water: Flood frequency: What is the downstream distance to the nearest Nearest fishery?	st drinkina v	water intake 2. > 15	Yes miles s	2000 ft	
					A	В	
LIF	(ELIHC	OOD OF RELEASE			Suspected Release	No Suspected Release	References
	SUSPE	ECTED RELEASE: If you suspect a release to sur a score of 550. Use only column A for this pat		(see page 11),	(840)		HOIGIGUES
2.	water,	SPECTED RELEASE: If you do not suspect a rel use the table below to assign a score based on and flood frequency. Use only column 8 for this	distance to			(800,400,300 er 100)	
Ì		Distance to surface water ≤ 2,500 feet	500	,			
		Distance to surface water > 2,500 feet, and					
ĺ		Site in annual or 10-year floodplain	500				
		Site in 100-year floodplain	400				
ļ		Site in 500-year floodplain	300			F	
}		Site outside 500-year floodplain	100			1000	SIL
<u> </u>				LR =	(684)	500	
				•			
DR	INKIN	G WATER THREAT TARGETS					
	drinkin	h drinking water intake within the target distancing water intake within the target distance limit, feceive zero scores. Name Water Body Type	actors 4, 5,				
				ofs			
4.	above Pathw	ARY TARGET POPULATION: If you suspect any has been exposed to a hazardous substance from ay Criteria List, page 11), list the intake name(s) based on the total population served.	m the site (see Surface Water			
				people x 10 =			
5.	drınkin	NDARY TARGET POPULATION: Determine the greater intakes that you do NOT suspect have to the from the site, and assign the total population.	been exposi	people served by			
		Are any intakes part of a blended system? Y		o	(\$0.20.10,2,1, er 0)	(30,10,2,1, = 0)	
6.	drinkin Neares	EST INTAKE: If you have identified a primary tar ig water threat (factor 4), assign a score of 50; of st Intake score from PA Table 3. If no drinking v iget distance limit, assign a score of zero.	otherwise,	ssign the		0	
7.	RESOL	JRCES			18 - G	5	
Щ						南	
				T =			

PA TABLE 3: VALUES FOR SECONDARY SURFACE WATER TARGET POPULATIONS

		Nearest			P	pulation	Served by	Intakes	Within Flo	w Catego	γ			
Surface Water		intake	1	31	101	301	1,001	3,001	10,001	30,001	100,001	300,001	Greater	
Body Flow		(choose	to	to	to	to	to	to	to	10	to	te	then	Population
(see PA Table 4)	Population	highest)	30	100	300	1,000	3,000	10,000	30,000	100,000	300,000	1,000,000	1,000,000	Value
< 10 ofs		20	2	5	16	52	163	521	1,633	5,214	16,325	52,136	163,246	
10 to 100 of		2	1	1	2	5	16	52	163	521	1,633	5,214	16,325	
>100 to 1,000 cfs	· ————	1	0	0	1	1	2	5	16	52	163	521	1,633	
>1,000 to 10,000 cfs		0	0	0	0	o	1,	1	2	5	16	52	163	
>10,000 cfs or Great Lakes		o	0	0	o	0	0	0	1	1	2	5	16	
3-mile Mixing Zone		10	1	3	8	26	82	261	816	2,607	8,162	26,068	81,663	
Neare										5	core =			

PA TABLE 4: SURFACE WATER TYPE / FLOW CHARACTERISTICS WITH DILUTION WEIGHTS FOR SECONDARY SURFACE WATER SENSITIVE ENVIRONMENTS

Type of	Type of Surface Water Body							
Water Body Type	OR	Flow	Weight					
minimal stream		< 10 cfe	1					
small to moderate stream		10 to 100 cfs	0.1					
moderate to large stream		> 100 to 1,000 cfs	N/A					
large stream to river		> 1,000 to 10,000 cfs	N/A					
large river		> 10,000 cfs	N/A					
3-mile mixing zone of								
quiet flowing streams or rivers		10 cfs or greater	N/A					
coastal tidal water (herbors,								
sounds, bays, etc.), ocean,		N/A	N/A					
or Great Lakes			}					

SURFACE WATER PATHWAY HUMAN FOOD CHAIN THREAT SCORESHEET

Likelihood of Release (LR)

LR is the same for all surface water pathway threats. Enter LR score from page 12.

Human Food Chain Threat Targets (T)

8. The only human food chain targets are fisheries. A <u>fishery</u> is an area of a surface water body from which food chain organisms are taken or could be taken for human consumption on a subsistence, sporting, or commercial basis. Food chain organisms include fish, shellfish, crustaceans, amphibians, and amphibious reptiles. Fisheries are delineated by changes in surface water body type (i.e., streams and rivers, lakes, coastal tidal waters, and oceans/Great Lakes) and whenever the flow characteristics of a stream or river change.

In the space provided, identify all fisheries within the target distance limit. Indicate the surface water body type and flow for each fishery. Gauging station flow data are available for many surface water bodies from USGS or other sources. In the absence of gauging station data, estimate flow using the list of surface water body types and associated flow categories in PA Table 4 (page 13). The flow for lakes is determined by the sum of flows of streams entering or leaving the lake. Note that, if there are no fisheries within the target distance limit, the Human Food Chain Threat Targets score is zero.

- 9. Primary fisheries are any fisheries within the target distance limit that you suspect have been exposed to a hazardous substance released from the site. Use professional judgment guided by the Surface Water Pathway Criteria List (page 11) to make this determination. If you identify any primary fisheries, list them in the space provided, enter 300 as the Primary Fisheries factor score, and do not evaluate Secondary Fisheries. Note that if you do not suspect a release, there can be no primary fisheries.
- 10. Secondary fisheries are fisheries that you do not suspect have been exposed to a hazardous substance. Evaluate this factor only if fisheries are present within the target distance limit, but none is considered a primary fishery.
- A. If you suspect a release to surface water and have identified a secondary fishery but no primary fishery, assign a score of 210.
- B. If you do not suspect a release, evaluate this factor based on flow. In the absence of gauging station flow data, estimate flow using the list of surface water body types and associated flow categories in PA Table 4 (page 13). Assign a Secondary Fisheries score from the table on the scoresheet using the lowest flow at any fishery within the target distance limit. (Dilution weight multiplier does not apply to PA evaluation of this factor.)

Sum the target scores in Column A (Suspected Release) or Column B (No Suspected Release).

SURFACE WATER PATHWAY (continued) HUMAN FOOD CHAIN THREAT SCORESHEET

_					
INTERIOR OF BELEASE			Suspected	No Suspected	
KELIHOOD OF RELEASE		-	Release	Release	References
ter Surface Water Likelihood of Release score	from page 12.	LR =	(960)	500.400.300 - 100	- -
	<u> </u>				
UMAN FOOD CHAIN THREAT TARGET	S				
Record the water body type and flow (if ap the target distance limit. If there is no fishe distance limit, assign a Targets score of 0 a	ery within the target	•			
Fishery Name	Weter Body Type	Flow			
Cooper River	RIVEX	30 cfs			
Dolawaye River	Rivex	>100 cts			
Selfman E 1975.					
		cfs			
		cfs			
		cfs			
SECONDARY FISHERIES		·	[214]		 .
. SECONDAIL FIGHERES					
A. If you suspect a release to surface water are but no primary fishery, assign a score of 21		ondary fishery			
B. If you do not suspect a release, assign a Se		e from the table		210.58. cr 12	
below using the lowest flow at any fishery	•				
Lowest Flow	Secondary Ficheries	Score			
< 10 cfs	210				
10 to 100 cfs	30				
> 100 cfs, coastal					
tidal waters, oceans,	12	1			
or Great Lakes		1		30	Wooder Res. 1
					Made KSS.
			1300,370 4	30	
		Τ=		<u> </u>	

SURFACE WATER PATHWAY ENVIRONMENTAL THREAT SCORESHEET

Likelihood of Release (LR)

LR is the same for all surface water pathway threats. Enter LR score from page 12.

Environmental Threat Targets (T)

- 11. PA Table 5 (page 16) lists sensitive environments for the Surface Water Pathway Environmental Threat. In the space provided, identify all sensitive environments located within the target distance limit. Indicate the surface water body type and flow at each sensitive environment. Gauging station flow data for many surface water bodies are available from USGS or other sources. In the absence of gauging station data, estimate flow using the list of surface water body types and associated flow categories in PA Table 4 (page 13). The flow for lakes is determined by the sum of flows of streams entering or leaving the lake. Note that if there are no sensitive environments within the target distance limit, the Environmental Threat Targets score is zero.
- 12. Primary sensitive environments are surface water sensitive environments within the target distance limit that you suspect have been exposed to a hazardous substance released from the site. Use professional judgment guided by the Surface Water Pathway Criteria List (page 11) to make this determination. If you identify any primary sensitive environments, list them in the space provided, enter 300 as the Primary Sensitive Environments factor score, and do not evaluate Secondary Sensitive Environments. Note that if you do not suspect a release, there can be no primary sensitive environments.
- 13. Secondary sensitive environments are surface water sensitive environments that you do not suspect have been exposed to a hazardous substance. Evaluate this factor only if surface water sensitive environments are present within the target distance limit, but none is considered a primary sensitive environment. Evaluate secondary sensitive environments based on flow.
 - In the table provided, list all secondary sensitive environments on surface water bodies with flow of 100 cfs or less.
 - 1) Use PA Table 4 (page 13) to determine the appropriate dilution weight for each.
 - 2) Use PA Tables 5 and 6 (page 16) to determine the appropriate value for each sensitive environment type and for wetlands frontage.
 - 3) For a sensitive environment that falls into more than one of the categories in PA Table 5, sum the values for each type to determine the environment value (e.g., a wetland with 1.5 miles frontage (value of 50) that is also a critical habitat for a Federally designated endangered species (value of 100) would receive a total value of 150).
 - 4) For each sensitive environment, multiply the dilution weight by the environment type (or length of wetlands) value and record the product in the far-right column.
 - 5) Sum the values in the far-right column and enter the total as the Secondary Sensitive Environments score. Do not evaluate part B of this factor.
 - If all secondary sensitive environments are on surface water bodies with flows greater than 100 cfs, assign 10 as the Secondary Sensitive Environments score.

Sum the target scores in Column A (Suspected Release) or Column B (No Suspected Release).

SURFACE WATER PATHWAY (continued) ENVIRONMENTAL THREAT SCORESHEET

LIKELIHOOD OF	RELEASE	Suspected Release	No Suspected Release	References		
Enter Surface Water	Likelihood of Release sco	ore from page 12.	LR =	(tta)	500	
ENVIRONMENTA	AL THREAT TARGETS					•
sensitive enviro and 5). If there	nment within the target of	applicable) for each surfactistance limit (see PA Tablent within the target distantantom of the page.	es 4			
Environment Nam	ne	Water Body Type	Flow			
Nathuio	re River	River	> 100 cts			
- Besauce	JE KIVEL	ravea	cfs			
			cfs			
			cfs			
present, but nor Sensitive Enviro A. For seconda	ne is a primary sensitive on inments based on flow, ary sensitive environment ess, assign scores as follo	CS: If sensitive environment environment, evaluate Secons s on surface water bodies ows, and do not evaluate (ondary with flows of part 8 of			
Row	DBution Weight (PA Table 4)	Environment Type and Vak (PA Tables 5 and 6)	ro Total			
	fs ,	T	= 75.5		·	
С	fs)	(=			
c	fs		-			
	fs					
<u>c</u>	ifsi 2	<u> </u>			<u> </u>	
ł	ary sensitive environments > 100 cfs, assign a score	ts are located on surface v	Sum =	1108	1100	
			Τ=		10	

PA TABLE 5: SURFACE WATER AND AIR PATHWAY SENSITIVE ENVIRONMENTS VALUES

Sensitive Environment	Assigned Value
Critical habitat for Federally designated endangered or threatened species	100
Manne Sanctuary	
National Park	•
Designated Federal Wilderness Area	
Ecologically important areas identified under the Coastal Zone Wilderness Act	
Sensitive Areas identified under the National Estuary Program or Near Coastal Water Program of the Clean Water	Act
Critical Areas Identified under the Cleen Lakes Program of the Clean Water Act (subareas in lakes or entire small I	lakes)
National Monument (air pathway only)	
National Seashore Recreation Area	
National Lakeshore Recreation Area	
Habitat known to be used by Federally designated or proposed endangered or threatened species	75
National Preserve	
National or State Wildlife Refuge	
Unit of Coastal Barrier Resources System	
Federal land designated for the protection of natural ecosystems	
Administratively Proposed Federal Wilderness Area	
Spewning areas critical for the maintenance of fish/shellfish species within a river system, bay, or estuary	
Migratory pathways and feeding areas critical for the maintenance of anadromous fish species in a river system	
Terrestrial areas utilized for breeding by large or dense aggregations of vertebrate enimals (air pathway) or	
semi-aquatic foragers (surface water pathway)	
National river reach designated as Recreational	
Habitat known to be used by State designated endangered or threatened species	50
Habitat known to be used by a species under review as to its Federal endangered or threatened status	
Coastal Barrier (partially developed)	
Federally designated Scenic or Wild River	
State land designated for wildlife or game management	25
State designated Scenic or Wild River	
State designated Natural Area	
Particular areas, relatively small in size, important to maintenance of unique biotic communities	
State designated areas for protection/maintenance of aquatic life under the Clean Water Act	5
See PA Table 6 (Surfu	ce Water Pathway
Wetlands or	
PA Table 9 (A	ir Pathway)

PA TABLE 6: SURFACE WATER PATHWAY WETLANDS FRONTAGE VALUES

Total Length of Wetlands	Assigned Value
Less then 0.1 mile	0
0.1 to 1 mile	25
Greater than 1 to 2 miles	50
Greater than 2 to 3 miles	75
Greater then 3 to 4 miles	100
Greater than 4 to 8 miles	150
Greater than 8 to 12 miles	250
Greater than 12 to 16 miles	350
Greater than 16 to 20 miles	450
Greater than 20 miles	500

SURFACE WATER PATHWAY WASTE CHARACTERISTICS, THREAT, AND PATHWAY SCORES

Waste Characteristics (WC)

14. Waste Characteristics: Score is assigned from page 4. However, if a primary target has been identified for any surface water threat, assign either the score calculated on page 4 or a score of 32, whichever is greater.

Surface Water Pathway Threat Scores

Fill in the matrix with the appropriate scores from the previous pages. To calculate the score for each threat: multiply the scores for LR, T, and WC; divide the product by 82,500; and round the result to the nearest integer. The Drinking Water Threat and Human Food Chain Threat are each subject to a maximum of 100. The Environmental Threat is subject to a maximum of 60. Enter the rounded threat scores in the far-right column.

Surface Water Pathway Score

Sum the individual threat scores to determine the Surface Water Pathway Score. If the sum is greater than 100, assign 100.

SURFACE WATER PATHWAY (concluded) WASTE CHARACTERISTICS, THREAT, AND PATHWAY SCORE SUMMARY

	A	B
	Suspected	No Suspected
WASTE CHARACTERISTICS	Release	Release
14. A. If you have identified any primary target for surface water (pages 12, 14, or 15), assign the waste characteristics score calculated on page 4, or a score of 32, whichever is GREATER; do not evaluate part 8 of this factor.	[100 w 32]	
	(100.32, = 16)	(100.32, er 18)
B. If you have NOT identified any primary target for surface water, assign the waste characteristics score calculated on page 4.	·	18
WC =		18,

SURFACE WATER PATHWAY THREAT SCORES

Threat	Likelihood of Release (LR) Score (from page 12)	Tergets (T) Score (pages 12, 14, 15)	Pethwey Waste Characteristics (WC) Score (determined above)	Threet Score LR x T x WC / 82,500
Drinking Water	500	5	18	1000 of 1000 o
Human Food Chain	500	30	18	3,27
Environmental	500	10	18	1.09

SURFACE WATER PATHWAY SCORE (Drinking Water Threat + Human Food Chain Threat + Environmental Threat) 0.55 + 3.27 + 1.09

4.91

SOIL EXPOSURE PATHWAY CRITERIA LIST

Areas of surficial contamination can generally be assumed. This "Criteria List" helps guide the process of developing a hypothesis concerning the exposure of specific targets to a hazardous substance at the site. Use the "Resident Population" section to evaluate site and source conditions that may help identify targets likely to be exposed to a hazardous substance. The check-boxes record your professional judgment. Answers to all of the listed questions may not be available during the PA. Also, the list is not all-inclusive; if other criteria help shape your hypothesis, list them at the bottom of the page or attach an additional page.

Check the boxes to indicate a "yes," "no," or "unknown" answer to each question.

SOIL EXPOSURE PAT	HWAY CRITERIA LIST
SUSPECTED CONTAMINATION	RESIDENT POPULATION
	Y N U e o n s Is any residence, school, or daycare facility on or within 200 feet of an area of suspected contamination?
Surficial contamination can generally be assumed.	Is any residence, school, or daycare facility located on adjacent land previously owned or leased by the site owner/operator? Is there a migration route that might spread hazardous substances near residences, schools, or daycare facilities?
	Have onsite or adjacent residents or students reported adverse health effects, exclusive of apparent drinking water or air contamination problems?
	□ □ □ Does any neighboring property warrant sampling?
•	Other criteria?
	RESIDENT POPULATION IDENTIFIED?
There is a potential into contact with soils. The site is so, that people a site freely. Estimate workers at 30.	for workers to come the contaminated adequately fenced annot luter the afe number of

SOIL EXPOSURE PATHWAY SCORESHEET

Pathway Characteristics

Answer the questions at the top of the page. Identify people who may be exposed to a hazardous substance because they work at the facility, or reside or attend school or daycare on or within 200 feet of an area of suspected contamination. If the site is active, estimate the number of full and part-time workers. Note that evaluation of targets is based on current site conditions.

Likelihood of Exposure (LE)

1. Suspected Contamination: Areas of surficial contamination are present at most sites, and a score of 550 can generally be assigned as a default measure. Assign zero, which effectively eliminates the pathway from further consideration, only if there is no surficial contamination; reliable analytical data are generally necessary to make this determination.

Resident Population Threat Targets (T)

- 2. Resident Population corresponds to "primary targets" for the migration pathways. Use professional judgment guided by the Soil Exposure Pathway Criteria List (page 18) to determine if there are people living or attending school or daycare on or within 200 feet of areas of suspected contamination. Record the number of people identified as resident population and multiply by 10 to determine the Resident Population factor score.
- 3. Resident Individual: Assign 50 if you have identified a resident population; otherwise, assign zero.
- 4. Workers: Estimate the number of full and part-time workers at this facility and adjacent facilities where contamination is also suspected. Assign a score for the Workers factor from the table.
- 5. Terrestrial Sensitive Environments: In the table provided, list each terrestrial sensitive environment located on an area of suspected contamination. Use PA Table 7 (page 20) to assign a value for each. Sum the values and assign the total as the factor score.
- 6. Resources: A score of 5 can generally be assigned as a default measure. Assign zero only if there is no land resource use on an area of suspected contamination.

Sum the target scores.

Waste Characteristics (WC)

7. Enter the WC score determined on page 4.

Resident Population Threat Score: Multiply the scores for LE, T, and WC. Divide the product by 82,500. Round the result to the nearest integer. If the result is greater than 100, assign 100.

<u>Nearby Population Threat Score:</u> Do not evaluate this threat if you gave a zero score to Likelihood of Exposure. Otherwise, assign a score based on the population within a 1-mile radius (use the same 1-mile radius population you evaluate for air pathway population targets):

<u>Soil Exposure Pathway Score:</u> Sum the Resident Population Threat score and the Nearby Population Threat score, subject to a maximum of 100.

SOIL EXPOSURE PATHWAY SCORESHEET

	Pethwey Characteristics		
	Do any people live on or within 200 ft of areas of suspected contamination?	Yes	No V/
	Do any people attend school or daycare on or within 200 ft of areas		
	of suspected contamination?	an Yes —	No V
	Is the facility active? Yes V No If yes, estimate the number of workers:	30	
			-
		Suspected	ļ
LII	(ELIHOOD OF EXPOSURE	Contamination	References
1.	SUSPECTED CONTAMINATION: Surficial contamination can generally be assumed,	, sac e u	
	and a score of 550 assigned. Assign zero only if the absence of surficial	550	
	contamination can be confidently demonstrated.	000	
RE	SIDENT POPULATION THREAT TARGETS		-
١,	RESIDENT POPULATION: Determine the number of people occupying residences		
	or attending school or daycare on or within 200 feet of areas of suspected		
1	contamination (see Soil Exposure Pathway Criteria List, page 18).	\wedge	
	people x 10 =	U]
١,	RESIDENT INDIVIDUAL: If you have identified a resident population (factor 2),	(W) = 0	
3.	assign a score of 50; otherwise, assign a score of 0.		
		[16, 10, 6, w of	1
4.	WORKERS: Use the following table to assign a score based on the total number of	,	
1	workers at the facility and nearby facilities with suspected contamination:		1
	Number of Workers Soore		
1	0 0	j	,
	1 to 100 5		
1	101 to 1,000 10	=	
1	>1,000 15		
_	TERRETTIAL CENTER PRINCE PRINCE PRINCE		
5.	TERRESTRIAL SENSITIVE ENVIRONMENTS: Use PA Table 7 to assign a value		
	for each terrestrial sensitive environment on an area of suspected contamination:	·	
	Containington.		
	Terrestrial Sensitive Environment Type Value		
1			
1			
	Sum =		
	RESOURCES	10-0]
0.	nesources	5	ĺ
		,	
	T =	$l \cap l \cap l$	
18/	• 1	, 0	1
74	ASTE CHARACTERISTICS		1
7	Assign the waste characteristics score calculated on page 4. WC =	1100, 32 - 10	
'`	Assign the Waste Characteristics score calculated on page 4.	18	
_			.
		100) to a secure of 100)	3
RE	SIDENT POPULATION THREAT SCORE: LE X T X WC	, -	
	SIDENT POPULATION THREAT SCORE: LE X T X WC SSOX / 0 × / 82,500	1.2	
	82500	110	J .
NE	EARBY POPULATION THREAT SCORE:	14,2/5)1	1
		a a	
		· · · · · · · · · · · · · · · · · · ·	
		(actor) 34 a 1001]
	DIL EXPOSURE PATHWAY SCORE:	13. 4	
Re	sident Population Threat + Nearby Population Threat]
	1.2 + 2		

PA TABLE 7: SOIL EXPOSURE PATHWAY TERRESTRIAL SENSITIVE ENVIRONMENT VALUES

Terrestrial Sensitive Environment	Assigned Value
Terrestrial critical habitat for Federally designated endangered or threatened species	100
National Park	
Designated Federal Wilderness Area	
National Monument	
Terrestrial habitat known to be used by Federally designated or proposed threatened or endangered species	75
National Preserve (terrestrial)	
National or State terrestrial Wildlife Refuge	
Federal land designated for protection of natural ecosystems	
Administratively proposed Federal Wilderness Area	
Terrestrial areas utilized by large or dense aggregations of animals (vertebrate species) for breeding	
Terrestrial habitat used by State designated endangered or threatened species	50
Terrestrial habitat used by species under review for Federal designated endangered or threatened status	
State lands designated for wildlife or game management	25
State designated Natural Areas	
Particular areas, relatively small in size, important to maintenance of unique biotic communities	

AIR PATHWAY CRITERIA LIST

This "Criteria List" helps guide the process of developing a hypothesis as to whether a release to the air is likely to be detected. The check-boxes record your professional judgment. Answers to all of the listed questions may not be available during the PA. Also, the list is not all-inclusive; if other criteria help shape your hypothesis, list them at the bottom of the page or attach an additional page.

The "Suspected Release" section identifies several conditions that could provide insight as to whether a release from the site is likely to be detected. If a release is suspected, primary targets are any residents, workers, students, and sensitive environments on or within ¼ mile of the site.

Check the boxes to indicate a "yes," "no," or "unknown" answer to each question. If you check the "Suspected Release" box as "yes," make sure you assign a Likelihood of Release value of 550 for the pathway.

AIR PATHWAY CRITERIA LIST					
SUSPECTED RELEASE	PRIMARY TARGETS				
Y N U e o n s k Are odors currently reported? Has release of a hazardous substance to the air been directly observed? Are there reports of adverse health effects (e.g., headaches, nausea, dizziness) potentially resulting from migration of hazardous substances through the air? Does analytical or circumstantial evidence suggest a release to the air?	If you suspect a release to air, evaluate all populations and sensitive environments within 1/4 mile (including those onsite) as primary targets.				
Other criteria?					
SUSPECTED RELEASE?					
Summarize the rationale for Suspected Release (attach an additional for Suspected Release (attach and suspected Release (attach an additional for Suspected Release (attach and	ditional page if necessary): LUSPECFED. Vacuum LE VEMOVE 99, 870 ME dust that is Preumatic				

AIR PATHWAY SCORESHEET

Pathway Characteristics

Answer the questions at the top of the page. Refer to the Air Pathway Criteria List (page 21) to hypothesize whether you suspect that a hazardous substance release to the air could be detected. Due to dispersion, releases to air are not as persistent as releases to water migration pathways and are much more difficult to detect. Develop your hypothesis concerning the release of hazardous substances to air based on "real time" considerations. Record the distance (in feet) from any source to the nearest regularly occupied building.

Likelihood of Release (LR)

- 1. Suspected Release: Hypothesize based on professional judgment guided by the Air Pathway Criteria List (page 21). If you suspect a release to air, use only Column A for this pathway and do not evaluate factor 2.
- 2. No Suspected Release: If you do not suspect a release, enter 500 and use only Column B for this pathway.

Targets (T)

- 3. Primary Target Population: Evaluate populations subject to exposure from release of a hazardous substance from the site. If you suspect a release, the resident, student, and worker populations on and within ¼ mile of the site are considered primary target population. If only the number of residences is known, use the average county residents per household (rounded up to the next integer) to determine the population. In the space provided, enter this population. Multiply the population by 10 to determine the Primary Target Population score. Note that if you do not suspect a release, there can be no primary target population.
- 4. Secondary Target Population: Evaluate populations in distance categories not suspected to be subject to exposure from release of a hazardous substance from the site. If you suspect a release, residents, students, and workers in the ¼- to 4-mile distance categories are secondary target population. If you do not suspect a release, all residents, students, and workers onsite and within 4 miles are considered secondary target population.

Use PA Table 8 (page 23). Enter the population in each secondary target population distance category, circle the assigned value, and record it on the far-right side of the table. Sum the far-right column and enter the total as the Secondary Target Population factor score.

- 5. Nearest Individual represents the threat posed to the person most likely to be exposed to a hazardous substance release from the site. If you have identified a primary target population, enter 50. Otherwise, assign the score from PA Table 8 (page 23) for the closest distance category in which you have identified a secondary target population.
- 6. Primary Sensitive Environments: If a release is suspected, all sensitive environments on or within ¼ mile of the site are considered primary targets. List them and assign values for sensitive environment type (from PA Table 5, page 16) and/or wetland acreage (from PA Table 9, page 23). Sum the values and enter the total as the factor score.
- 7. Secondary Sensitive Environments: If a release is suspected, sensitive environments in the %- to ½-mile distance category are secondary targets; greater distances need not be evaluated because distance weighting greatly diminishes the impact on site score. If you do not suspect a release, all sensitive environments on and within ½ mile of the site are considered secondary targets. List each secondary sensitive environment on PA Table 10 (page 23) and assign a value to each using PA Tables 5 and 9. Multiply each value by the indicated distance weight and record the product in the farright column. Sum the products and enter the total as the factor score.
- 8. Resources: A score of 5 can generally be assigned as a default measure. Assign zero only if there is no land resource use within ½ mile.

Sum the target scores in Column A (Suspected Release) or Column B (No Suspected Release).

Waste Characteristics (WC)

9. Waste Characteristics: Score is assigned from page 4. However, if you have identified any primary target for the air pathway, assign either the score calculated on page 4 or a score of 32, whichever is greater.

Air Pathway Score: Multiply the scores for LR, T, and WC. Divide the product by 82,500. Round the result to the nearest integer. If the result is greater than 100, assign 100.

AIR PATHWAY SCORESHEET

LIKELIHOOD OF RELEASE Referee	B No Suspected Release	
LIKELIHOOD OF RELEASE . Suspented Release	No Suspected	
LIKELIHOOD OF RELEASE Referee		
	Polosee -	
;\$4Q	Vennte	References
SUSPECTED RELEASE: If you suspect a release to air (see page 21), assign a score of 550. Use only column A for this pathway.	(600)	
NO SUSPECTED RELEASE: If you do not suspect a release to air, assign a score of 500. Use only column B for this pathway.	500	
LR =	500	
TARGETS		
PRIMARY TARGET POPULATION: Determine the number of people subject to exposure from a suspected release of hazardous substances to the air. people x 10 =		
4. SECONDARY TARGET POPULATION: Determine the number of people not suspected to be exposed to a release to air, and assign the total population score using PA Table 8.	157	
5. NEAREST INDIVIDUAL: If you have identified any Primary Target Population for the air pathway, assign a score of 50; otherwise, assign the Nearest Individual score from PA Table 8.	20	
6. PRIMARY SENSITIVE ENVIRONMENTS: Sum the sensitive environment values (PA Table 5) and wetland acreage values (PA Table 9) for environments subject to exposure from a suspected release to the air.		
Sensitive Environment Type Velue		
Sum =		
7. SECONDARY SENSITIVE ENVIRONMENTS: Use PA Table 10 to determine the score for secondary sensitive environments.	0.68	
8. RESOURCES	5	
Т =	182.68	
WASTE CHARACTERISTICS		
9. A. If you have identified any Primary Target for the air pathway, assign the waste characteristics score calculated on page 4, or a score of 32, whichever is GREATER; do not evaluate part B of this factor.	(100.32, <i>s</i> 10)	
B. If you have NOT identified any Primary Target for the air pathway, assign the waste characteristics score calculated on page 4.	18	
wc =	18	
AIR PATHWAY SCORE: LR x T x WC 82,500 19.	93	
500 x 182.68 x 18 82500		

PA TABLE 8: VALUES FOR SECONDARY AIR TARGET POPULATIONS

		Nearest		Population Within Distance Category											
		Individual	7	11	31	101	301	1,001	3,001	10,001	30,001	100,001	300,001	Qreater	
Distance		(choose	lo	to	to	to	10	to	to	te	te	te	l to	then	Population
from Site	Population	highest)	10	30	100	300	1,000	3,000	10,000	30,000	100,000	300,000	1,000,000	1,000,000	Value
Oneite	30	20	. 1	2	6	16	52	163	521	1,633	5,214	16,325	52,136	163,246	2
>0 to % mile	935	20	1	1	1	4	13	41	130	408	1,303	4,081	13,034	40,811	13
>% to % mile	5632	2	0	0	1	1	3	9	28	88	282	882	2,815	8,815	28
>% to 1 mile	21043	1	0	0	o	1	· 1	3	8	26	83	261	834	2,812	26
>1 to 2 miles	60067	٥	0	0	0	0	1	1	3	8	27	83	266	833	27
>2 to 3 miles	117233	٥	0	0	0	0	1	1	1	4	12	38	120	376	38
>3 to 4 miles	265177	0	0	0	o	0	0	1	1	2	7	23	73	229	23
Nearest I	ndividual =	20	Score =								157				

PA TABLE 9: AIR PATHWAY VALUES FOR WETLAND AREA

Wetland Area	Assigned Value
Less than 1 acre	0
1 to 50 acres	25
Greater than 50 to 100 acres	75
Greater than 100 to 150 acres	125
Greater than 150 to 200 acres	175
Greater than 200 to 300 acres	250
Greater than 300 to 400 acres	350
Greater than 400 to 500 acres	450
Greater than 500 acres	500

PA TABLE 10: DISTANCE WEIGHTS AND CALCULATIONS FOR AIR PATHWAY SECONDARY SENSITIVE ENVIRONMENTS

Distance	Distance Weight	Sensitive Environment Type and Value (from PA Table 5 or 9)	Product
Onsite	0.10	×	
		x	
		x	
0-1/4 mi	0.025	х ,	
		x	
		* Fed. habitat for endangered tish	
1/4-1/2mi	0.0054	× .75	0.41
		* State habitat for endangered tis	
		x 50	0.27
		Total Environments Score =	0.68

SITE SCORE CALCULATION

In the column labeled S, record the Ground Water Pathway score, the Surface Water Pathway score, the Soil Exposure Pathway score, and the Air Pathway score. Square each pathway score and record the result in the S² column. Sum the squared pathway scores. Divide the sum by 4, and take the square root of the result to obtain the Site Score.

SUMMARY

Answer the summary questions, which ask for a qualitative evaluation of the relative risk of targets being exposed to a hazardous substance from the site. You may find your responses to these questions a good cross-check against the way you scored the individual pathways. For example, if you scored the ground water pathway on the basis of no suspected release and secondary targets only, yet your response to question #1 is "yes," this presents apparently conflicting conclusions that you need to reconsider and resolve. Your answers to the questions on page 24 should be consistent with your evaluations elsewhere in the PA scoresheets package.

SITE SCORE CALCULATION

	S	S ²
GROUND WATER PATHWAY SCORE (Sow):	100 /	10,000
SURFACE WATER PATHWAY SCORE (S _{sw}):	4.91	24.11
SOIL EXPOSURE PATHWAY SCORE (S,):	3.2	10.24
AIR PATHWAY SCORE (S ₄):	19.93 √	397.20
SITE SCORE:	$\sqrt{\frac{S_{gw^2} + S_{sw^2} + S_{s^2} + S_{a^2}}{4}}$	51.06

SUMMARY

		YES	NO
1.	Is there a high possibility of a threat to any nearby drinking water well(s) by migration of a hazardous substance in ground water?		X
	A. If yes, identify the well(s).		
	B. If yes, how many people are served by the threatened well(s)?		
2.	Is there a high possibility of a threat to any of the following by hazardous substance migration in surface water?		
	A. Drinking water intake B. Fishery	000	*
	C. Sensitive environment (wetland, critical habitat, others) D. If yes, identify the target(s).		×
3.	Is there a high possibility of an area of surficial contamination within 200 feet of any residence, school, or daycare facility?		×
	If yes, identify the property(ies) and estimate the associated population(s).		
4.	Are there public health concerns at this site that are not addressed by PA scoring considerations? If yes, explain:		×